



Quality Access Doors - FAST!

TECHNICAL DATA SHEET

DESCRIPTIONS

Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.

SPECIFICATIONS

MATERIAL: 18 gauge CRS frame and 20 gauge blades. Min size 6" W x 4" H, Max 48" W x 80" H. Multiple sections can be combined for larger sizes.

CONSTRUCTION: Louvers: Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision.

800A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.

DOOR: ___ 1-3/4" Any Style.
___ 1 3/8"-1 3/4" - 800C, 800A, 800 (Core).

Door cutout = order size.

FASTENERS: Phillips head screws #8 x 3/4" to match finish.

FREE FLOW AREA: 50% free area.


SKU: **ADC-BAG-DLSYG-G**

INVERTED Y-BLADE LOUVER



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

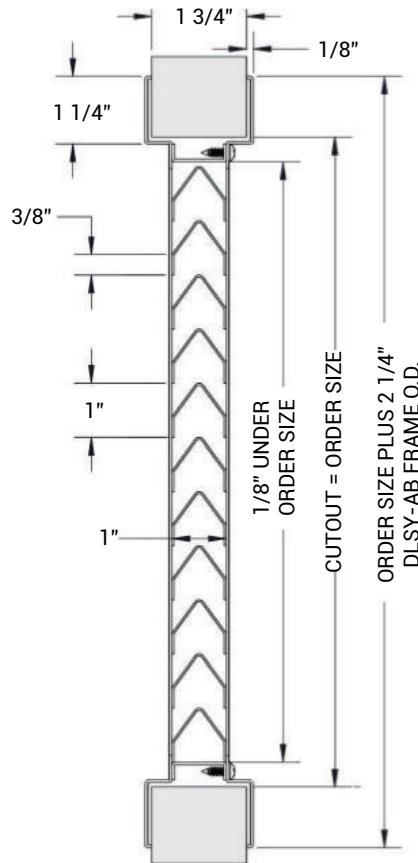

For a complete list of options visit www.AccessDoorsCanada.ca

PROJECT DATA

Custom Sizes & Options Available - Fast!

Scan or Click



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-679-3405
FAX:
1-888-622-9920



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA



WEBSITE:
www.AccessDoorsCanada.ca
E-MAIL:
info@AccessDoorsCanada.ca

To view Pricing and Additional Product Info.