SUBMITTAL/TECHNICAL DATA SHEET

cendrex

STANDARD OPTIONS

MATERIAL: 16 Gauge cold rolled steel

HINGE: Continuous piano hinge, located in the second dimension (height)

LOCK / LATCH: Self latching tool-key operated slam latch and/or ring operated slam latch, both included

INSIDE PANEL RELEASE: Mechanism allowing panels to open from inside, standard on all doors over 12'' x 12''

FLANGE: 22-gauge galvanized steel, 2 ¾" drywall bead flange

FRAME: 2½" in depth, made of cold rolled steel

FINISH: High quality white powder coat primer

PACKAGING: Individually wrapped, 1 per box

OPTIONS AVAILABLE

LOCK / LATCH:
- Key-operated cylinder cam latch (-10)
- Mortise slam latch (-85, cylinder optional)
- Mortise deadbolt lock (-40, cylinder optional)

HANDLE: Fixed 4'' handle (-21)
4'' handle-operated slam latch (-22)

MATERIAL: Stainless Steel (SS)

For a complete list of options visit www.AccessDoorsCanada.ca

Scan or Click

To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS

SKU: **ADC-PFN-PLY**

FIRE RATED UNINSULATED ACCESS DOOR

WITH PLASTER BEAD FLANGE

INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

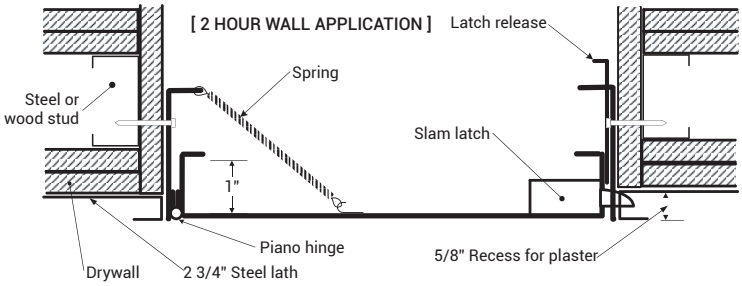

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES	(MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8	(203 x 203)	1	5.7	2.6
10 x 10	(254 x 254)	1	7.3	3.3
12 x 12	(304 x 304)	1	8.9	4.0
14 x 14	(355 x 355)	1	10.9	4.5
16 x 16	(406 x 406)	1	12.7	5.8
18 x 18	(457 x 457)	1	14.9	6.8
22 x 22	(558 x 558)	1	19.7	8.9
22 x 30	(558 x 762)	1	24.5	11.1
22 x 36	(558 x 914)	2	29.0	13.2
24 x 24	(609 x 609)	1	22.1	10.0
24 x 36	(609 x 914)	2	30.6	13.9
24 x 48	(609 x 1219)	2	39.5	17.7
30 x 30	(762 x 762)	1	31.1	14.1
32 x 32	(812 x 812)	2	35.0	15.9
36 x 36	(914 x914)	2	41.3	18.7
30 x 30	(762 x 762)	2	62.9	28.1

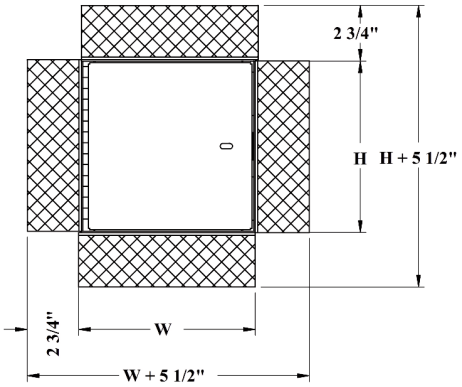

Rough wall opening is door size + 1/4" or + 6 mm

Fire Rating Information on Page 3
Check Second Page for Complete Option List

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-679-3405
FAX:
1-888-622-9920

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.AccessDoorsCanada.ca

E-MAIL:
info@AccessDoorsCanada.ca

cendrex SUBMITTAL
TELEPHONE: 1-800-679-3405
FAX: 1-888-622-9920
385 WILSON STREET EAST, SUITE 302
ANCASTER, ON, L9G 2C1
CANADA
WEBSITE: www.AccessDoorsCanada.ca
E-MAIL: info@AccessDoorsCanada.ca

ADC-PFN-PLY

FIRE RATED UNINSULATED ACCESS DOOR WITH PLASTER BEAD FLANGE

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

☐ 35
Screwdriver operated cam latch

☐ 220
Screwdriver operated cylinder Cam latch

☐ 80
Ring/tool key operated slam latch

☐ 55
Hex head slam latch and ring key operated slam latch

☐ 30
Slide latch

☐ 50
Allen hex head cam latch

HANDLES

☐ 25
WITH KEY - 4“ handle and key operated cam latch

☐ 100K
Key-operated recessed handle cam latch with cap over key path

☐ 20
WITHOUT KEY - 4“ handle operated cam latch

☐ 22
WITHOUT KEY - 4“ handle operated slam latch

☐ 21
WITHOUT KEY
Fixed 4“ handle

☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

☐ 10
Key-operated cylinder cam latch

☐ 15
Mortise cam latch preparation
15C
Mortise cam latch preparation, keyed differently
15CKA
Mortise cam latch preparation, keyed alike

☐ 85
Mortise slam latch

☐ 85C
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder keyed alike

☐ 90
Pinned hex head cam latch

☐ C
Cylinder cam latch, keyed differently
CKA
Cylinder cam latch, keyed alike

MATERIALS

☐ GS
Galvanneal steel

☐ AL
Aluminum

☐ SS
Stainless steel

☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

☐ 40
Mortise deadbolt lock

☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA
Mortise deadbolt lock

☐ 99
Inside release thumbturn for mortise deadbolt lock

☐ 45
Mortise preparation for detention deadbolt lock

☐ 46
Detention deadbolt lock

☐ 47
ClDetention deadbolt Key

OTHERS

☐ 60
Gasket

☐ 160
Holding cable

☐ 240
Masonry anchors

ADC-PFN-PLY | FIRE RATED UNINSULATED ACCESS DOOR WITH PLASTER FLANGE

FIRE RATING

FOR VERTICAL USE ONLY:

CERTIFIED TO STANDARDS: UL 10B (2008) (R2020), NFPA 252 (2022), CAN/ULC (2015) (R2020).

RATING ACHIEVED: 3 hours, neutral/negative pressure

MAXIMUM SIZE: 48" wide x 48" high (1219 mm x 1219 mm). Maximum area of 2304 in². Tolerance on height and width limitation is± 3" (76 mm) as long as the area does not exceed 2304 in².

TEMPERATURE RISE: No rating achieved.

INSTALLATION: WALLS AND CEILINGS

[2 HOUR WALL APPLICATION]

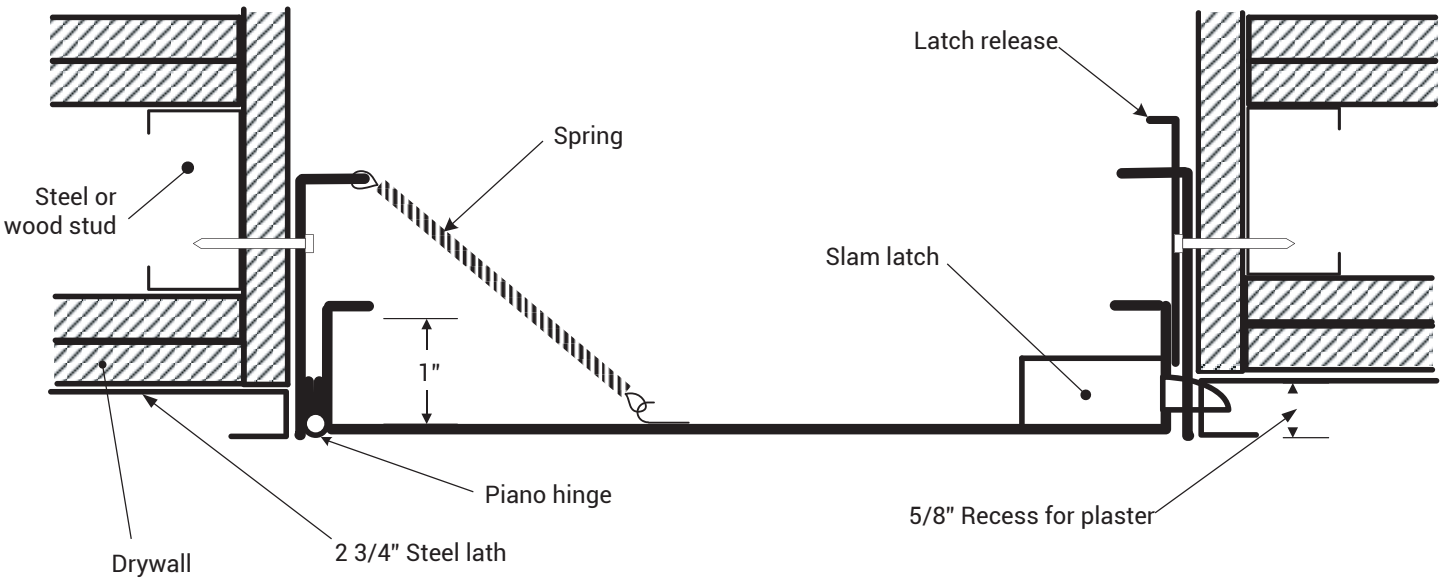

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

TELEPHONE:
1-800-679-3405
FAX:
1-888-626-9920

385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA

WEBSITE:
www.AccessDoorsCanada.ca
E-MAIL:
info@AccessDoorsCanada.ca