



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

These access panels feature a metal flange that is recessed 3/4" from the face of the frame for application of plaster. Model TME has additional expanded metal lath wings. A continuous hinge, ensures easy opening of the panel. Door size is order size. Finished with durable white powder coat paint.

SPECIFICATIONS

DOOR PANEL: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

FRAME: 16 gauge steel with 1 3/8" wide metal flange and 3/4" deep plaster stop for application of plaster.

LOCK: Flush screwdriver-operated steel cam standard.

SIZES:


Minimum Size 6" x 6",
Max Size Wall: 36" x 48",
Max Size Ceiling: 36" x 36".



SKU: **ADC-TMP**
ACCESS PANELS
FOR PLASTER WALLS & CEILINGS

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

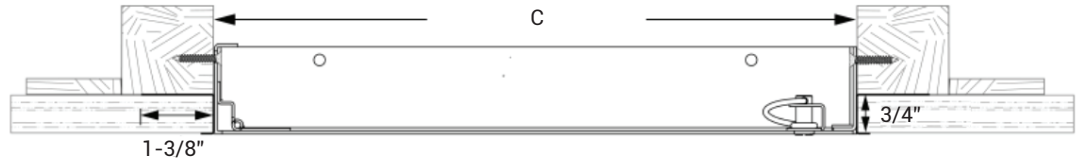

STANDARD SIZES:

A- Model Size = Door Size Width x Height	C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latches
	Width	Height		
12" x 12"	12 1/2"	12 1/2"	7 lbs	1
16" x 16"	16 1/2"	16 1/2"	10 lbs	1
16" x 20"	16 1/2"	20 1/2"	12 lbs	2
18" x 18"	18 1/2"	18 1/2"	12 lbs	3
24" x 24"	24 1/2"	24 1/2"	19 lbs	4
				TBD

Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above
For Example 16-1/4", 16-1/2" or 16-3/4"
Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".

Standard Color is White, Optional Colors at Additional Cost



For detailed specifications see submittal sheet

For a complete list of options visit
www.AccessDoorsCanada.ca

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-679-3405
FAX:
1-888-622-9920



385 WILSON STREET EAST,
SUITE 302
ANCASTER, ON, L9G 2C1
CANADA




WEBSITE:
www.AccessDoorsCanada.ca
E-MAIL:
info@AccessDoorsCanada.ca

ADC-TMP

ACCESS PANELS FOR PLASTER WALLS & CEILINGS

LATCH AND LOCK OPTIONS

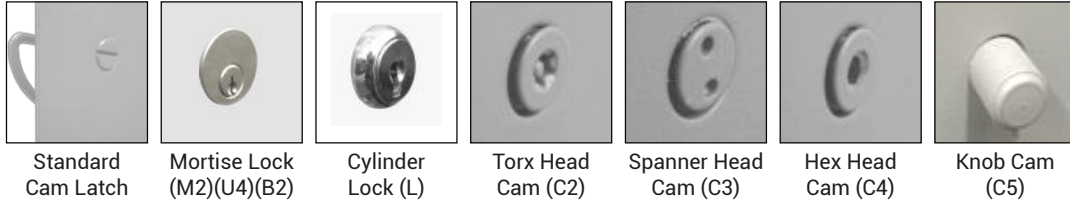

NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

Cold Rolled Steel

- 14 gauge door with 16 gauge frame
- 16 gauge door with 14 gauge frame
- 14 gauge door with 14 gauge frame

304 Stainless Steel

- 14 gauge door with 16 gauge frame
- 16 gauge door with 14 gauge frame
- 14 gauge door with 14 gauge frame

OPTIONS AT ADDITIONAL COST:

- | | |
|--|--|
| <ul style="list-style-type: none"> ■ Gasketing (3 sides) ■ Louvered vents (attach louver selector page) ■ Plexiglass view window ■ Removable Door (no hinges) ■ Optional Color Code: ■ Alternate depth of trim flange: ■ 316 Stainless construction (select SS option above) ■ (L) Cylinder lock installed ■ (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length ■ (M2) Mortise cam lock (06431) installed ■ #0646 Brass Retaining Ring for MP (may be required for locks by others. | <ul style="list-style-type: none"> ■ (U3) Mortise slam lock prep ■ (U4) Mortise slam lock (06431) installed ■ (B1) Mortise deadbolt prep ■ (B2) Mortise deadbolt lock (06441) installed ■ (C2) Torx head cam ■ (C3) Spanner head cam ■ (C4) Hex head cam ■ (C5) Knob cam ■ Other 1-1/8" dia. mortise cylinder by request* |
|--|--|