




# SUBMITTAL/TECHNICAL DATA SHEET

## DESCRIPTION

The TMS model is perfect for Masonry, Tile and Wallboard is an all purpose 16 gauge stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place.

SKU: **ADC-TMS**

## STAINLESS STEEL FLUSH ACCESS PANELS

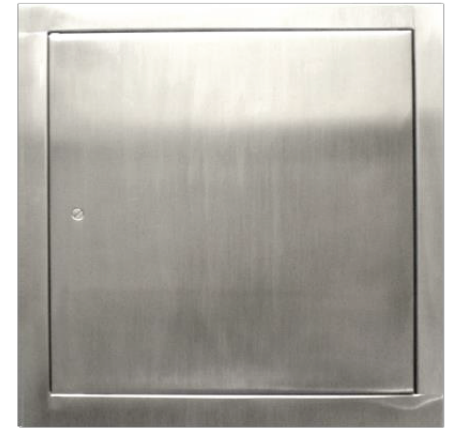

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

## SPECIFICATIONS


**FRAME:** 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.

**DOOR:** 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.


**FINISH:** 304 stainless, #4 Satin finish.

**LOCK:** Flush screwdriver-operated steel cam - C.

**SIZES:**  
Minimum 6" x 6",  
Maximum 48" x 48"

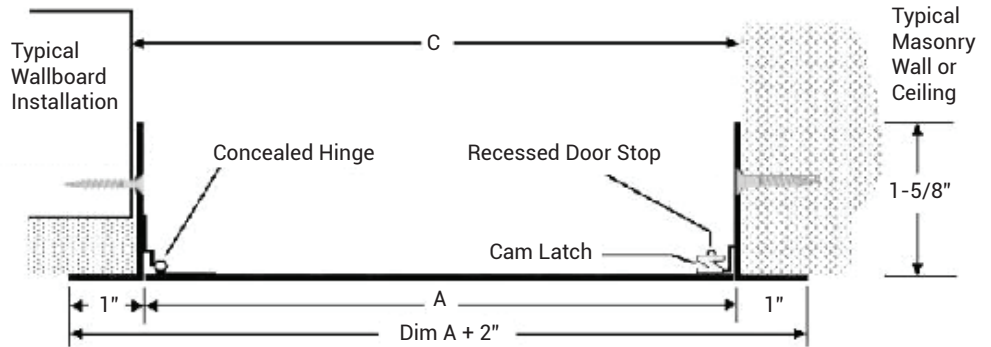

### LATCH AND LOCK OPTIONS

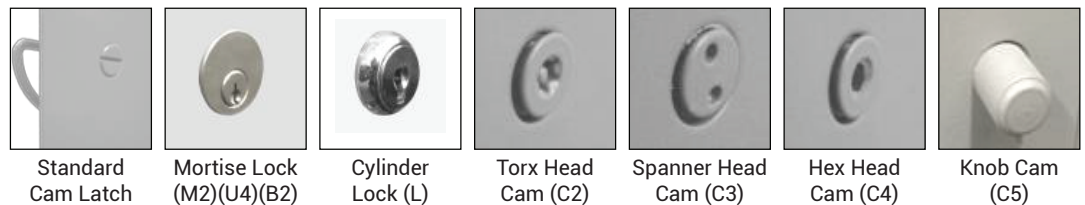

For detailed specifications see submittal sheet

For a complete list of options visit [www.AccessDoorsCanada.ca](http://www.AccessDoorsCanada.ca)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-679-3405  
FAX:  
1-888-622-9920



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.AccessDoorsCanada.ca](http://www.AccessDoorsCanada.ca)  
E-MAIL:  
[info@AccessDoorsCanada.ca](mailto:info@AccessDoorsCanada.ca)



# ADC-TMS MULTI-PURPOSE ACCESS PANEL FOR WALLS & CEILINGS

A- Model Size = Door Size  Width x Height	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latches
	Width	Height	Width	Height		
6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6

Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above  
For Example 16-1/4", 16-1/2" or 16-3/4"  
Minimum Size 6" x 6", Max Size 48" x 48"

**NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:**

- 14 gauge door with 16 gauge frame
- 16 gauge door with 14 gauge frame
- 16 gauge door with 16 gauge frame
- 14 gauge door with 14 gauge frame

**OPTIONS AT ADDITIONAL COST:**

- Plexiglass View Window
- Rain Hood
- Gasketing
- Removable Door with no hinges
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- (M2) Mortise cam lock (06431) installed
- #0646 Brass Retaining Ring for M1 -may be required for locks by others
- Other 1-1/8" dia. mortise cylinder by request:
- (U3) Mortise slam lock prep
- (U4) Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam
- (C2) Torx head cam
- (C4) Hex head cam
- (C3) Spanner head cam