cendrex

SUbMITTAI / TECHNICAI DATA SHEET

GENERAL PURPOSE ACCESS DOOR
WITH DRyWAll FIANGE

AHD-GYP

INSTALLATION

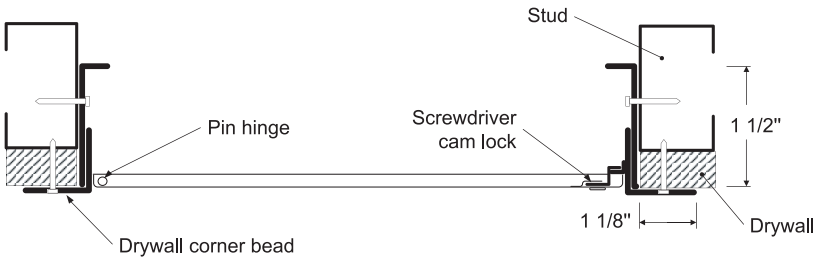

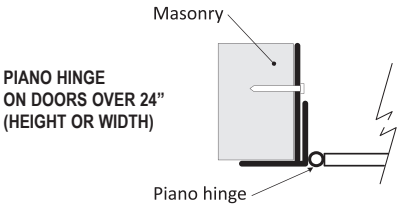

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to I EED® credits.

Your odd sizes: Made in 5 days

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	3	1.4
10 x 10 (254 x 254)	1	4	1.8
12 x 12 (304 x 304)	1	5	2.3
14 x 14 (356 x 356)	1	7	3.2
16 x 16 (406 x 406)	1	8	3.6
18 x 18 (457 x 457)	1	10	4.5
*24 x 24 (609 x 609)	1	15	6.8
*24 x 36 (609 x 914)	2	22	10

Rough wall opening is door size + 1/4" or + 6mm
*Piano hinge on doors over 24 inches (height or width)
The IHD-GyP model is recommended for over 1296 sq. inches

Click here to Online Product Page and Pricing

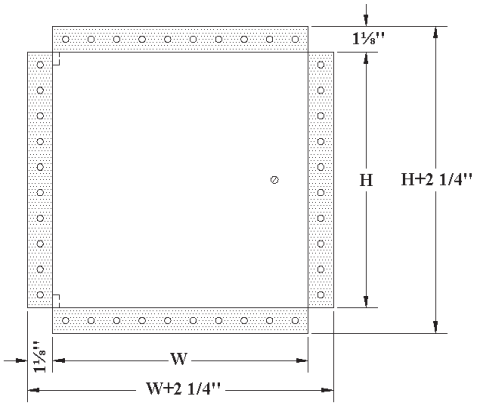

DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel
Hinge: hidden pin hinge
continuous piano type on doors over 24" (height or width)
Lock / latch: screwdriver operated cam latch
Finish: high quality white powder coat primer
Packaging: individually wrapped, 1 per box
GYP: drywall corner beads flange

POPULAR OPTIONS For complete list of options go to: www.AccessDoorsCanada.ca

Lock / latch: key operated cylinder cam latch, hex head cam latch, pinned hex head cam latch, handle operated cam latch, mortise preparation for cylinder.
Material: stainless steel 304 #4 (brushed finish)
Gasketing: neoprene gasket

CENDREX PARTNERS

PROJECT DATA

PROjECT NAME:	QTy	W	H	OPTIONS
ARCHITECT:				
DEAIER:				
CONTRACTOR:				
IOCA TION:	SPECIAI INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUbMITTAI APPROvAI: (signature or stamp)			

Email: info@accessdoorscanada.ca
Website: www.AccessDoorsCanada.ca
Phone: 1-800-679-3405
Fax: 1-888-622-9920
AccessDoorsCanada