



# SUBMITTAL/TECHNICAL DATA SHEET

Doors are ideally suited for new installations or for remodeling in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners.

**Door and Frame** are fabricated from 16 gauge, galvanized steel with a white prime coat finish.

**Frame** is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance.

**Concealed Pivoting Rod Hinge** prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

**Latch** is screwdriver operated.

**Finish** is a white prime coat suitable for painting.



SKU: **ADC-DW**

## DRY WALL ACCESS DOOR



### GUIDE SPECIFICATION

Dry Wall Access Doors (Specify model number and options.) Access door and frame shall be fabricated from 16 gauge, galvanized steel with a white prime coat finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be screwdriver operated. Finish shall be a white prime coat suitable for painting.

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

- DW Dry Wall Access Door (16 Gauge Steel)

#### SUFFIX OPTIONS

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- MAS Masonry Anchor Straps
- MLP Mortise Cylinder Lock (Prep)
- SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)
- TH 'T' Handle



For a complete list of options visit [www.AccessDoorsCanada.ca](http://www.AccessDoorsCanada.ca)

### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

#### STANDARD SIZES:

DOOR SIZE (W x H)	WALL OPENING	LOCK QTY	WEIGHT LBS
DW 6" x 6"	6-1/2" x 6-1/2"	1	3.0 LBS.
DW 8" x 8"	8-1/2" x 8-1/2"	1	3.0 LBS.
DW 8" x 12"	8-1/2" x 12-1/2"	1	4.0 LBS.
DW 10" x 10"	10-1/2" x 10-1/2"	1	4.0 LBS.
DW 12" x 12"	12-1/2" x 12-1/2"	1	5.5 LBS.
DW 12" x 16"	12-1/2" x 16-1/2"	1	6.0 LBS.
DW 12" x 18"	12-1/2" x 18-1/2"	2	6.5 LBS.
DW 12" x 24"	12-1/2" x 24-1/2"	3	9.5 LBS.
DW 14" x 14"	14-1/2" x 14-1/2"	1	6.0 LBS.
DW 14" x 20"	14-1/2" x 20-1/2"	3	8.0 LBS.
DW 14" x 24"	14-1/2" x 24-1/2"	3	15.0 LBS.
DW 15" x 15"	15-1/2" x 15-1/2"	1	6.5 LBS.
DW 16" x 16"	16-1/2" x 16-1/2"	1	7.5 LBS.
DW 16" x 20"	16-1/2" x 20-1/2"	3	8.5 LBS.
DW 16" x 24"	16-1/2" x 24-1/2"	3	10.0 LBS.
DW 18" x 18"	18-1/2" x 18-1/2"	3	9.0 LBS.
DW 18" x 24"	18-1/2" x 24-1/2"	5	12.0 LBS.
DW 18" x 36"	18-1/2" x 36-1/2"	6	16.0 LBS.
DW 20" x 20"	20-1/2" x 20-1/2"	3	11.0 LBS.
DW 20" x 24"	20-1/2" x 24-1/2"	5	13.0 LBS.
DW 20" x 30"	20-1/2" x 30-1/2"	5	15.0 LBS.
DW 22" x 22"	22-1/2" x 22-1/2"	3	12.0 LBS.
DW 22" x 30"	22-1/2" x 30-1/2"	5	16.0 LBS.
DW 22" x 36"	22-1/2" x 36-1/2"	6	22.0 LBS.
DW 24" x 24"	24-1/2" x 24-1/2"	3	15.0 LBS.
DW 24" x 30"	24-1/2" x 30-1/2"	5	17.0 LBS.
DW 24" x 36"	24-1/2" x 36-1/2"	6	20.5 LBS.
DW 24" x 48"	24-1/2" x 48-1/2"	7	28.0 LBS.
DW 30" x 30"	30-1/2" x 30-1/2"	7	21.5 LBS.
DW 30" x 36"	30-1/2" x 36-1/2"	8	29.0 LBS.
DW 32" x 32"	32-1/2" x 32-1/2"	7	23.0 LBS.
DW 36" x 36"	36-1/2" x 36-1/2"	8	31.5 LBS.
DW 36" x 48"	36-1/2" x 48-1/2"	9	42.0 LBS.
DW 48" x 48"	48-1/2" x 48-1/2"	11	58.0 LBS.

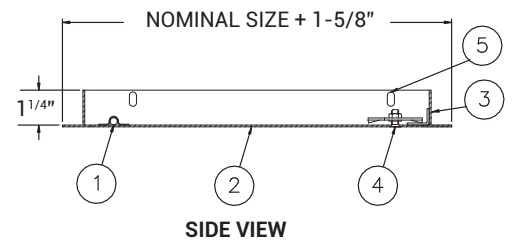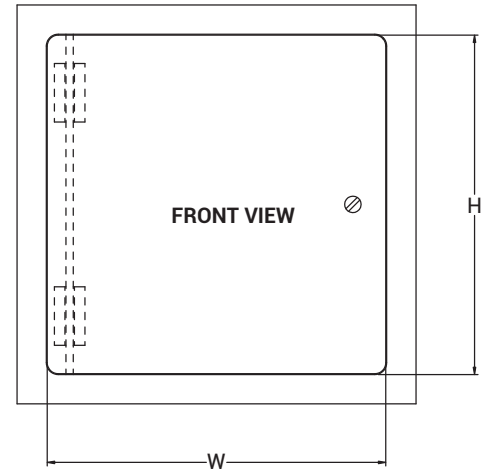

#### NOTES:

1. CONCEALED PIVOTING ROD HINGE
2. DOOR
3. FRAME
4. SCREWDRIVER OPERATED LATCH
5. MOUNTING HOLES

### PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-679-3405  
FAX:  
1-888-622-9920



385 WILSON STREET EAST,  
SUITE 302  
ANCASTER, ON, L9G 2C1  
CANADA



WEBSITE:  
[www.AccessDoorsCanada.ca](http://www.AccessDoorsCanada.ca)

E-MAIL:  
[info@AccessDoorsCanada.ca](mailto:info@AccessDoorsCanada.ca)